

Static LED

MaxiLED Small Globe Series

Static Colours

KEY FEATURES

- Static Colours
- IP68
- 24VDC



Product Overview

MaxiLED Strands provide exceptionally long strands of globe-lensed LEDs that can be used to outline trees buildings and bridges or connect architectural features with brilliant white / colour lighting. Each strand is built for permanent installations with rugged, injection-molded outer globes, heavy gauge wiring and dependable LEDs. More than one colour can be used on a single strand.

Specifications

Electrical specification	Static Colours
Power input:	24VDC
LED Current:	-
Watts per unit:	0.6w
Max. Units per system (1.5mm sq cable):	See Chart below
Lumens (Est.)	-
Lumen Maintenance 85%:	70,000Hrs

LED options	
Cool White (10,000K):	YES
Warm White (2700K):	YES
Red, Green, Blue, Pink and Amber	YES

System Cable Distances	
Max. Run distance	100m (328 ft)

Protection	
IP Rating:	IP68
Operation Temperature:	-25 to +50

Globe	
Material:	UV stabilized polycarbonate

Listings:	
	UL / cUL, CE. BS EN60598, IEC 60598

Cable Colours	
Black (Standard):	YES
White: (Minimum order):	YES (on request)
RAL (Minimum order):	YES (on request)


Dimensions & Weights	
Diameter (mm):	34 mm (1.3/8ins)
Height (mm):	34 mm (1.3/8ins)
Weight:	24G (0.8 Ounce)

Transformer	Max. Quantity of Fittings
100W	100 Globes
150W	200 Globes
240W	300 Globes

Even though the total load is below the power supply capacity, this is due to the inrush current limitations on start up.






MM (INCHES)

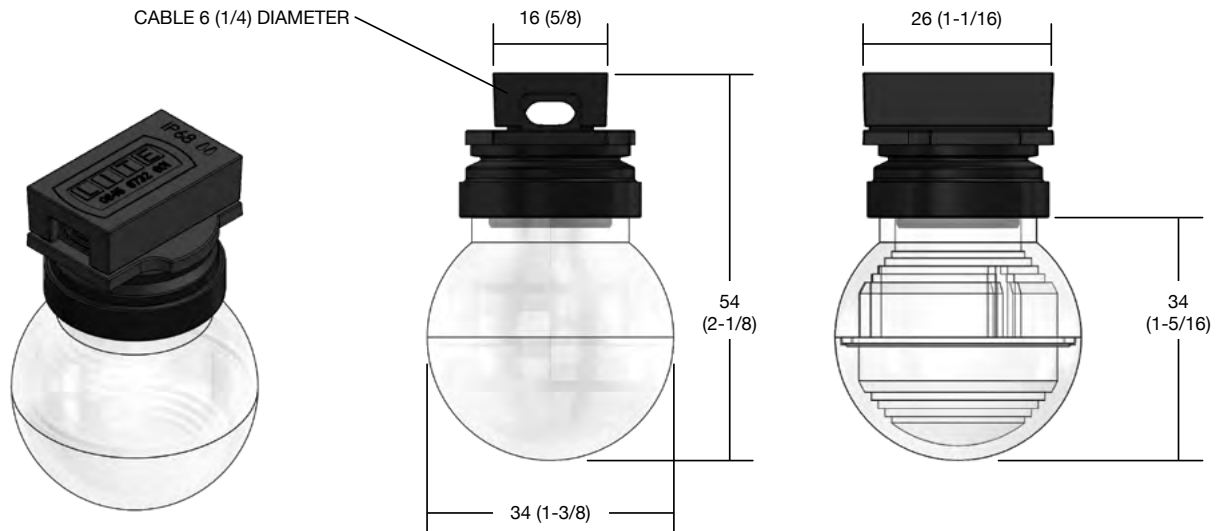



This product must be installed by a qualified electrician in accordance with all national and local electrical and construction codes. Failure to comply with the installation instructions can result in serious injury or death.

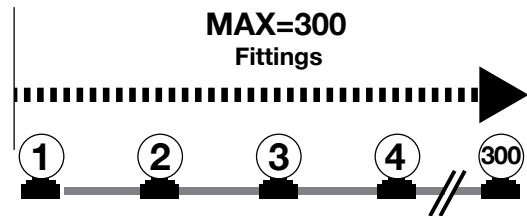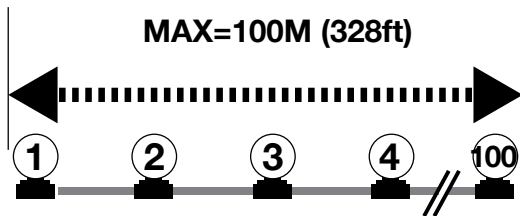
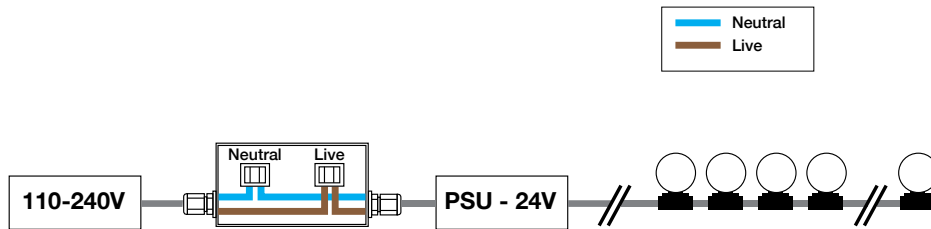




This product must be installed by a qualified electrician in accordance with all national and local electrical and construction codes.
Failure to comply with the installation instructions can result in serious injury or death.




1 Place rubber grommets over MaxiLED Cable

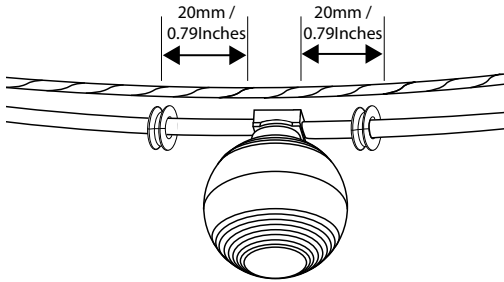

(a). Make sure catenary cable is taught and secure.

(b). With the secure catenary cable above the MaxiLED Cable, place a rubber grommet 20mm / 0.79 inches either side of the MaxiLED housing.

2 Secure MaxiLED Cable

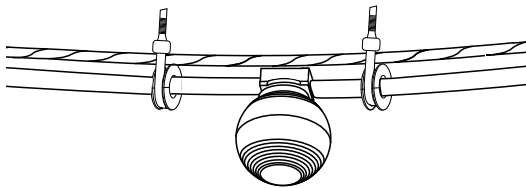


(a). Using a suitable sized UV resistant zip tie (4.8mm width), secure the grommet up against the catenary cable.

(b). Trim excess cable tie.

NOTE: GROMMET PLACED OVER MAXILED CABLE


3 Repeat Procedure

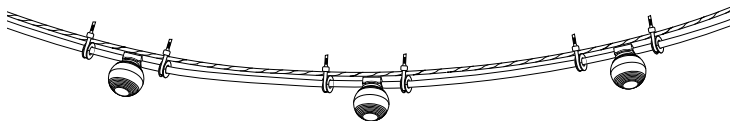

(a). Repeat process 1-2 until the installation is complete.

(b). Connect the installed unit to the correct transformer.

4 Alternative Fixing Method

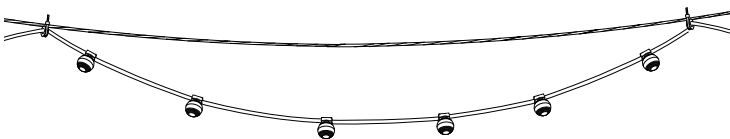

(a). alternative fixing method creating a hoop effect.


The transformer must be installed by a qualified electrician in accordance with all national and local electrical and construction codes.
Failure to comply with the installation instructions can result in serious injury or death.



This product must be installed by a qualified electrician in accordance with all national and local electrical and construction codes.
Failure to comply with the installation instructions can result in serious injury or death.




1 Fitting the Fixing Clip to the desired Surface



(a). Screw fix the Fixing clip to the desired surface.

NOTE: Correct screw must used to assure that the head is counter sunk within the fixing clip.

2 Spacing the Fixing Clip

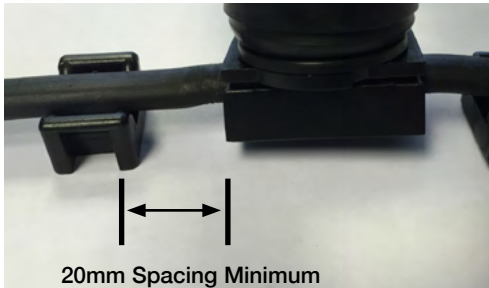

(a). Ensure that the Spacing between each Fixing Clip and MaxiLED Globe is 20mm Minimum

3 Cable Tie the MaxiLED Strand Cable to the Fixing Clip



(a). Using the Supplied UV/Weather resistant Cable tie.

(b). Feed the Cable tie through the Fixing Clip and Secure the MaxiLED Strand Cable

4 Repeat Procedure

(a). Repeat process 1-3 until the installation is complete.




Ordering

EXAMPLES: UKSSG-CW-CL-BC-I-1000-9000-100-90, UKSSG-VW-ML-WC-M-180-3000-100-30

PRODUCT CODE	LED COLOR		LENS	CABLE COLOR
UKSSG				
UKSLG CE MaxiLED Small Globe Series	Tem 2700K -	Tem 10000K	CL Clear lens	BC Black cable
USLSG USA MaxiLED Small Globe Series	CW Cool white	WW Warm white	ML Matte lens	WC White cable
	R Red	G Green		
	B Blue	A Amber		
	P Pink			
	PAT Pattern. Enter PAT and complete the following:			
	EXAMPLE: 2 red (R), 2 white (W), two blue (B), repeat (<)			
MEASUREMENT UNITS	LENGTH OF STARTER CABLE	LENGTH OF GLOBE CABLE	NUMBER OF GLOBES	GLOBE SPACING
M Metric units (cm)	CMS OR INS	CMS OR INS	1 TO 200	CMS OR INS
I Imperial units (in)	Starter Cable + Globe Cable <= 10,500 cm (4,133 ins)			Assumes Globes are spaced at the same distance on the strand. For inconsistently spaced Globes on a strand, contact factory.

Ordering Definitions and Assistance



LENGTH OF GLOBE CABLE

If you know the **NUMBER OF GLOBES** and the **GLOBE SPACING** for a strand, you can verify your **LENGTH OF GLOBE CABLE**.

A) NUMBER OF GLOBES (MAX 200).....

B) GLOBE SPACING (CMS OR INS).....

C) Divide answer A by answer B.....

NUMBER OF GLOBES

If you know the **LENGTH OF GLOBE CABLE** and the **GLOBE SPACING**, you can verify your **NUMBER OF GLOBES**.

A) LENGTH OF GLOBE CABLE (CMS OR INS).....

B) GLOBE SPACING (CMS OR INS).....

C) Divide answer A by answer B.....

GLOBE SPACING

If you know the **LENGTH OF GLOBE CABLE** and the **NUMBER OF GLOBES** for a strand, you can verify your **GLOBE SPACING**.

A) LENGTH OF GLOBE CABLE (CMS OR INS).....

B) NUMBER OF GLOBES (MAX 200).....

C) Divide answer A by answer B.....

Global Distributors

Australia:

Light Project Pty Ltd.
T: +61 3 8415 1970
E: info@lightproject.com.au
W: www.lightproject.com.au

Ireland:

Fantasy Lights
T: +353 1 460 1052
M: +353 87 927 3566
E: sales@fantasylights.com
W: www.fantasylightsgroup.ie

MENA/GCC Region (Including Turkey & Turkic Republics)

M +44 (0) 7598 995730
E: timothyplumb@lite-ltd.co.uk
W: www.maxiledlighting.com

Netherlands:

Q CAT Lighting
T: +31 (0) 10 415 18 11
E: info@qcat.nl
W: www.qcat.nl

New Zealand:

Energy Light Ltd.
T: +64 3 977 2034
E: customerservice@energylight.net
W: www.energylight.net

North America:

VLT
T: +1 949 581 9398
E: info@vltdcorp.com
W: www.vltdcorp.com

Singapore:

Technolite
T: +65 6453 1978
E: enquiry@technolite.com.sg
W: www.technolite.global

South Africa:

SSLI - Solid State Lighting
M: +27(0)82 785 3890
E: ross_blakeway@ssli.com
W: www.ssli.co.za

Sweden:

Sweden Stockholm Lighting
T: +46 721 470 087
SMS: +46 709 909 110
E: oscar@stockholmighting.se

United Kingdom:

LITE Ltd.
D: +44 (0)1592 757 202
M +44 (0)7866 724625
E: ian@lite-ltd.co.uk
W: www.lite-ltd.co.uk



Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY
T: +44 (0)845 8732 601

E: sales@maxiledlighting.com Web: www.maxiledlighting.com